
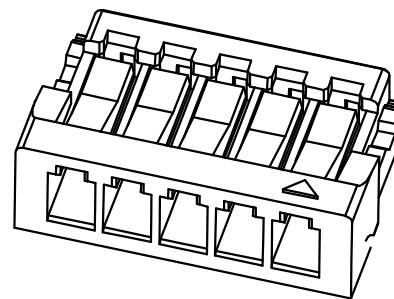
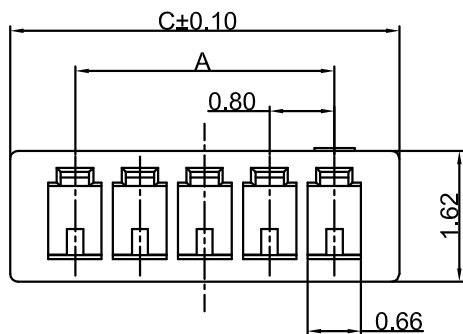
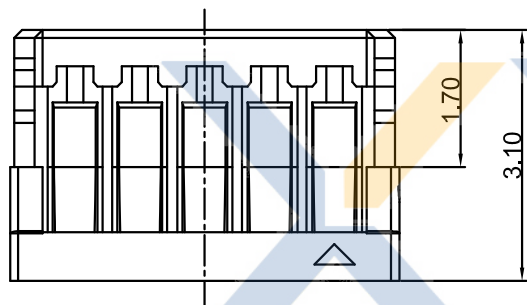


DRAWING FOR CUSTOMER

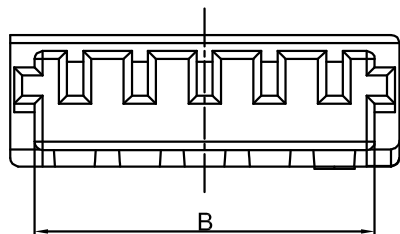

3D View

KB802-X X H X A

Pin No.

Version

Housing

Mold No.

■ Specifications:


- Rated Voltage: 30V AC,DC
- Rated Current: 0.5A AC,DC
- Withstand Voltage: 200V AC/minute
- Contact Resistance: 20mΩ, (MAX.)
- Insulation Resistance: 100MΩ, (MIN.)
- Temperature Range: -25°C~+85°C

■ Housing:

- Material: Nylon66 UL94V-0

Dimensions

Pin	A	B	C
2P	0.80	1.80	4.40
3P	1.60	2.60	5.20
4P	2.40	3.40	6.00
5P	3.20	4.20	6.80
6P	4.00	5.00	7.60
7P	4.80	5.80	8.40
8P	5.60	6.60	9.20
9P	6.40	7.40	10.00
10P	7.20	8.20	10.80
11P	8.00	9.00	11.60
12P	8.80	9.80	12.40
13P	9.60	10.60	13.20
14P	10.40	11.40	14.00
15P	11.20	12.20	14.80
16P	12.00	13.00	15.60



XYCO PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2016-03-30		A			TOLERANCE 公差	DRAWING 設計者	譚火秦	KB802-XXHXA		UNIT 單位		mm	PRODUCT NAME 產品名稱	JST SUH PH0.8 Wire to Board Housing No ear
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	彭太坤	PART NO. 料號	DWG NO. 圖號	PE1903A	mm			
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15